




SlowStop Bollard-Type 1

(3" Diameter)

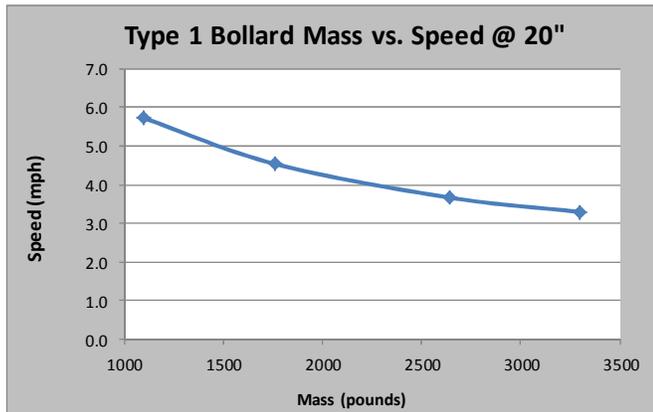

Color: Standard Yellow Bollard on Black Base

Diameter: 2.88" (2.5" ANSI Schedule 40)

Height: 42"

Set Screws: 5 M12 x 1.75
6mm Hex

Cap: Black Plastic



SPECIFICATIONS

- Energy Absorption: 1,621 joules / 1,195 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating.

RECOMMENDED USES

- Rack Guarding
- Equipment Guarding
- Drive-Thru Lanes
- Utility Protection
- Access Denial
- Gas Pump Protection
- Post-Tensioned Concrete
- Not for K-Rated Security Use

IMPACTrecovery
SYSTEMS

"Performance for a Safer Tomorrow"

4955 Stout Dr. San Antonio, TX 78219
210.736.4477, 800.736.5256, fax: 210.734.6448
www.slowstop.com