




# SlowStop Bollard-Type 2

## (4" Diameter)

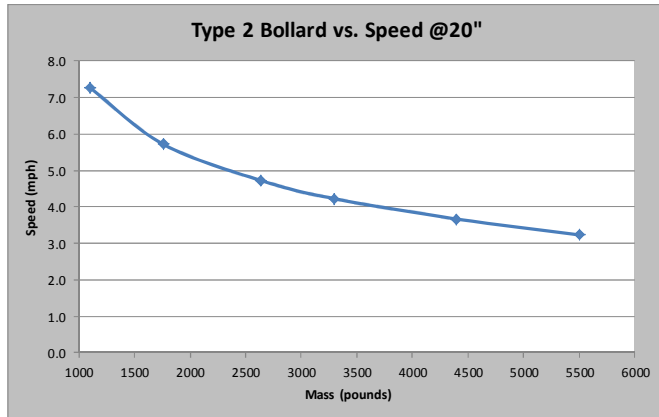


**Color:** Standard Yellow Bollard on Black Base


**Diameter:** 4" (3.5" ANSI Schedule 40)  
**Height:** 42"

**Set Screws:** 5 M16 x 2.00  
8mm Hex

**Cap:** Black Plastic

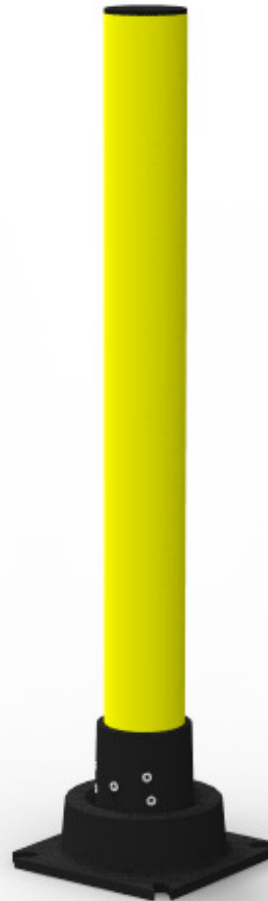

Installs with four (4) 5/8" x 5-1/2"  
Concrete Anchor Screws



### SPECIFICATIONS

- Energy Absorption: 2,667 joules / 1,967 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating

### RECOMMENDED USES

- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Utility Protection
- Pedestrian Safety
- Access Denial
- Gas Pump Protection
- Post-tensioned Concrete
- Not for K-Rated Security Use

**IMPACTrecovery**  
**SYSTEMS**

"Performance for a Safer Tomorrow"

4955 Stout Dr. San Antonio, TX 78219  
210.736.4477, 800.736.5256, fax: 210.734.6448  
[www.slowstop.com](http://www.slowstop.com)