






SlowStop Bollard-Type 3

(6.63" Diameter)

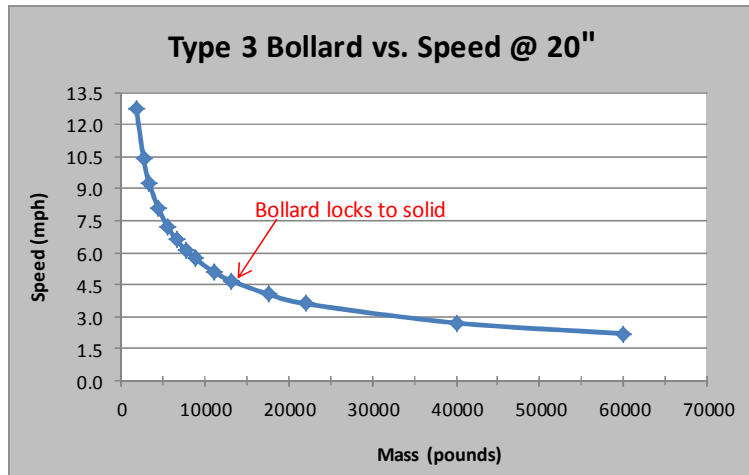

- Color: Standard Yellow Bollard on Black Base
- Diameter: 6.63" (6" ANSI Schedule 40)
- Height: 42"
- Set Screws: 8 M16 x 2.00
8mm Hex
- Cap: Black Plastic

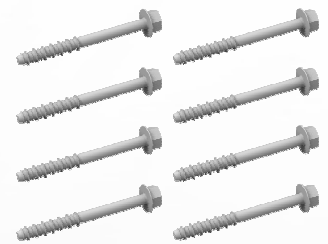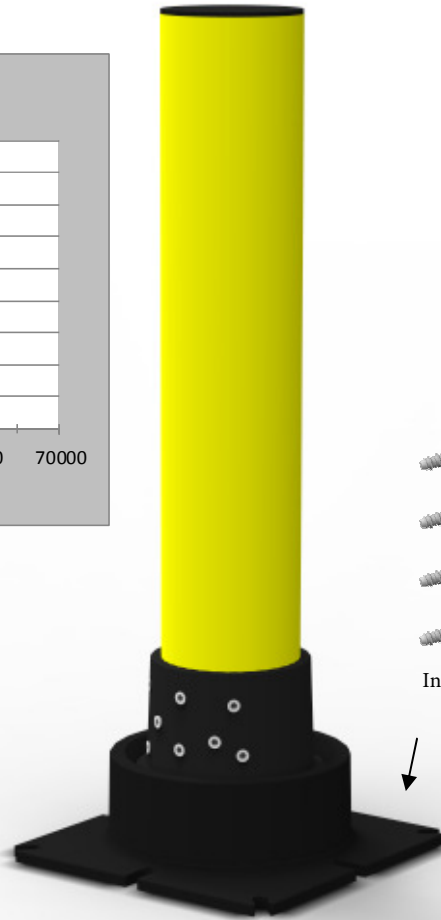

Installs with eight (8) 5/8" x 5-1/2" Concrete Anchor Screws

SPECIFICATIONS

- Energy Absorption: 12,934 joules / 9,536 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating.

RECOMMENDED USES

- Loading Docks and Warehouse Entrance Ramps
- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Utility Protection
- Pedestrian Safety
- Access Denial
- Post-tensioned Concrete
- Not for K-Rated Security Use

IMPACTrecovery
SYSTEMS

"Performance for a Safer Tomorrow"

4955 Stout Dr. San Antonio, TX 78219
210.736.4477, 800.736.5256, fax: 210.734.6448
www.slowstop.com