


# alerttile®

## semi-rigid surface applied detectable warning

AlertTile® is a glass reinforced thermoset composite engineered for superior impact resistance, slip resistance, wear resistance and long-term durability for retrofit applications.

AlertTile®'s exclusive design incorporates a thin, slightly flexible profile with a perimeter beveled edge to provide a safe pedestrian transition.

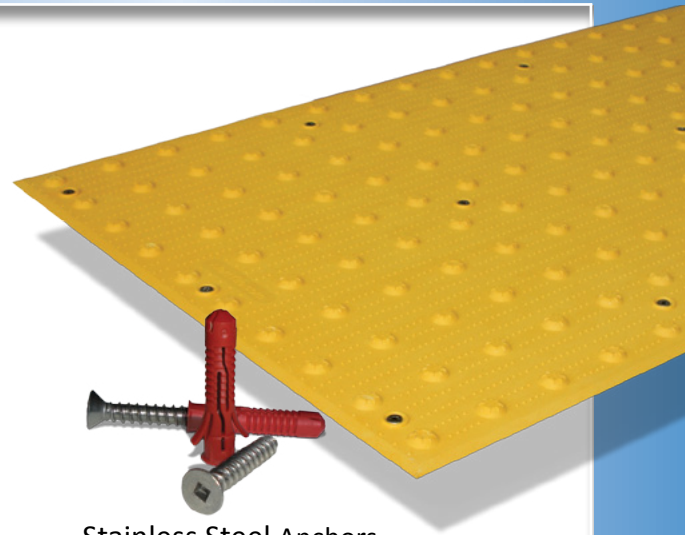

Stainless Steel Anchors

## Features

- **Semi-rigid composition** – 30,000 psi strength yet flexible enough to conform to ramp irregularities
- **Premium UV Treatment**– ensures long term color retention
- **Proven Anchoring System** – premium adhesive and HILTI HUD-1 anchors with stainless steel screws
- **Perimeter Beveled Edges** – for safe pedestrian transition
- **AlertTile Universal** – uses patented Penetrator anchors for cast in place applications, allows distributors ability to stock single tile for surface and cast in place installations

## Installation



*Fast, easy installation with included adhesive and anchor system. Apply adhesive to scored areas on back, place in desired location and install anchors*

## Physical Characteristics

- **Compressive Strength** - 30,000 psi
- **Flexural Strength** - 18,000 psi
- **Dome Spacing** - 2.35" Center to Center
- **Slip Resistance** - Dry = 1.03 / Wet = .83
- **Freeze / Thaw Durability** - Pass-No change
- **Color** - Integral Throughout

## Colors



Safety Yellow



Colonial Red



Brick Red




Black




Gray


## Sizes




2' x 3'



2' x 4'



2' x 5'



3' x 2'

3' x 2'

3' x 4'