
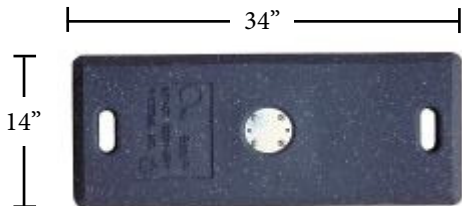


2009 MUTCD Standard In-Street School Crosswalk Sign


SIDE VIEW

12"x 40" fluorescent yellow green diamond grade reflective sheeting with 10"x 24 white hi-intensity sheeting insert. White post and panel.

Overall height of unit is 47".

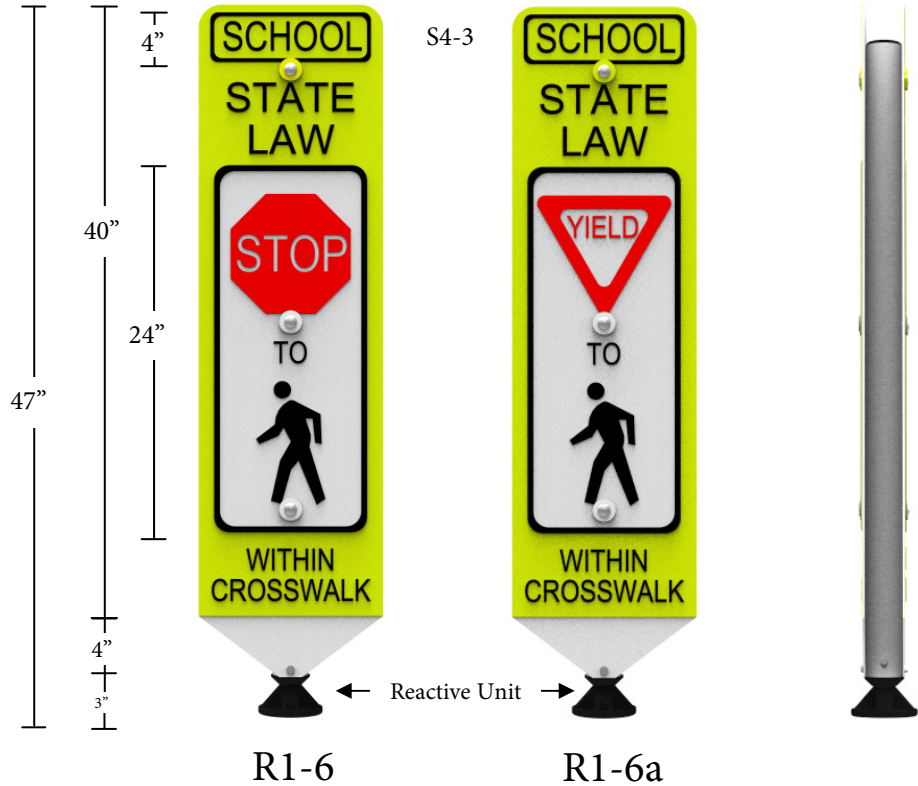

#103QR Portable One Base (P)



#101NS Fixed Base (F)

This product can be used with either the #103QR Portable Base (P) or #101NS Fixed Base (F)

SPECIFICATIONS

- Post and panel is constructed of flexible polyethylene plastic that is resistant to: ultraviolet light, ozone, and hydrocarbons.
- Unit has an anti-twist reactive spring assembly that rebounds to upright when struck.
- NCHRP-350 Approved
- Weight: 12 pounds without base

RECOMMENDED USES

- Ideal for delineating school crosswalks to reduce the risk of injury, death, and property damage.
- Take care to avoid creating a trip hazard when using any sign in a crosswalk. Ensure that sign bases are outside the crosswalk area.

IMPACTrecovery
SYSTEMS

"Performance for a Safer Tomorrow"

4955 Stout Dr. San Antonio, TX 78219
210.736.4477, 800.736.5256, fax: 210.734.6448
www.impactrecovery.com